


REVISIONS			
REV.	DESCRIPTION	DATE D/M/Y	BY
00	Original	06/12/01	AC

Design Scope: 3:1 to 2:1


Max. depth 20-30m

Item	Axys Part Number
1	51308006 Shackle, Jaw&Jaw Swivel, 1/2", SS316
2	024160199 TRIAXYS, Mooring 15m, Compliant
3	N/A
4	51211004 Buoy,Trawl Float, 8", w/Centre Holey2
5a	024580199 Shackle, D, 1/2", SS316, Drilled
5b	51308001 Shackle, Anchor, Galvanized, 1/2"
6	51707002-45m;Wire Rope, Plastic Coated, Galvanized, 1/4 to 5/16" 51306017 Plastic, Thimble, Nylon, 1/2"Teardrop 51302001 Clamp, NicoPress Sleeve, Copper, 5/16"
7	51708002 Chain, 1/2", Galvanized
8	Anchor ~300 kgs (heavy chain) (~660 lbs)-supplied if required only

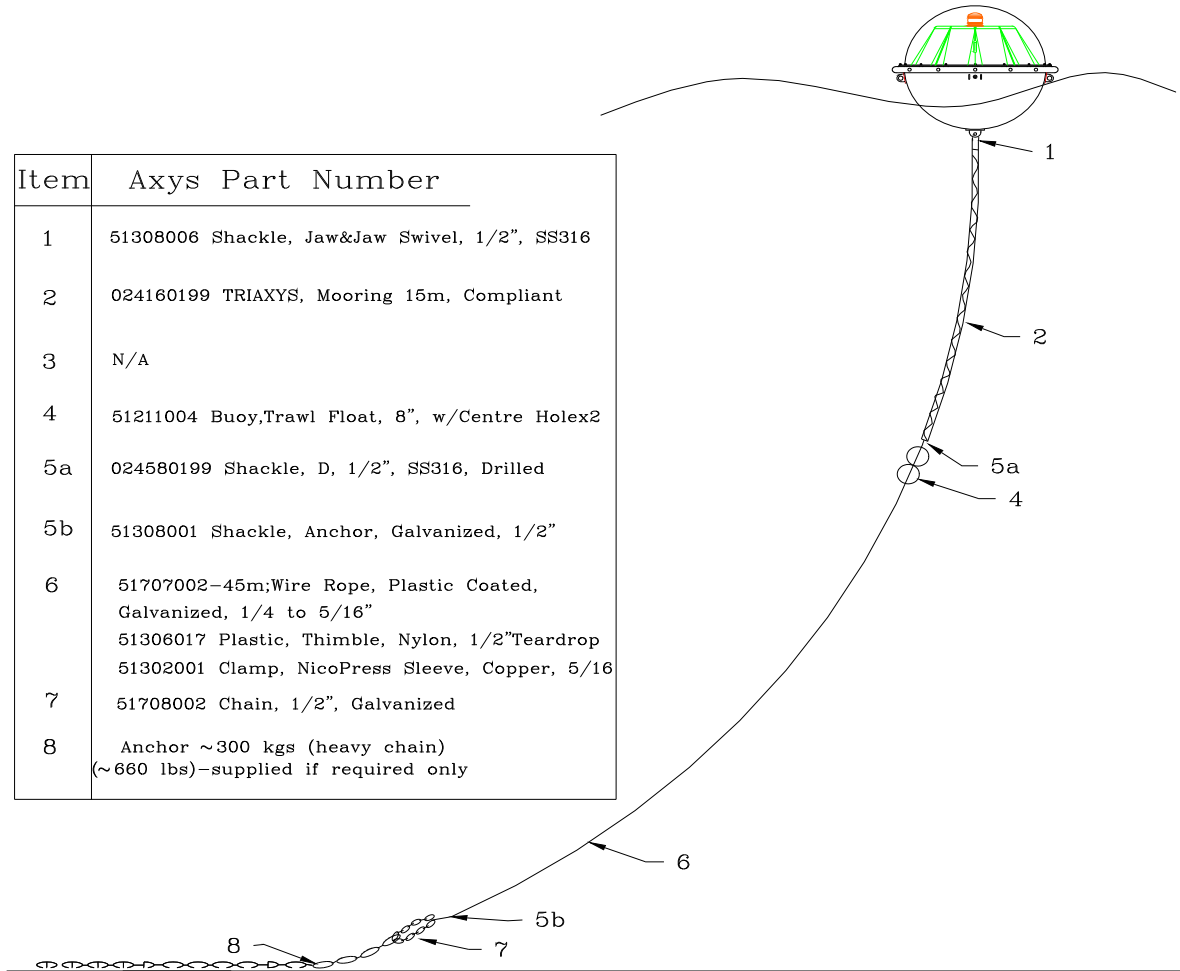

When printed, make sure you are using the most current revision of this document.

This document in its entirety contains proprietary information that shall not be disclosed to any third parties without obtaining prior permission from Axys Group Ltd. The bearer of this document shall take suitable precautions to prevent the disclosure of any information contained in this document to any parties that do not have the permission to receive that information.

DESIGNER RK	QA	This drawing is controlled through Q-PULSE	TEMPLATE # QT-04-04-00.dwg
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED. LINEAR TOLERANCES ARE: X ±0.1 X.X ±0.03 X.XX ±0.01 X.XXX ±0.003 ANGULAR TOLERANCES ARE: X.X ±0.1 X.XX ±0.05		 AXYS TECHNOLOGIES INC. P.O. BOX 2219, 2045 MILLS RD. SIDNEY, B.C., CANADA V8L 3S8 (250)655-5850 Fax: (250)655-5856	
MATERIAL		TRIAXYS, Mooring 20-30m Deployment Depth	
FINISH	SCALE	NTS	DRAWN BY AC DATE 06/12/01
ACAD FILE ..\CONTROLLED DOCUMENTS\ 02901\0290100S.dwg	ASSEMBLY DWG	SIZE A	DRAWING NUMBER 02901 REV 00